


SXP2-HT-SC19-5,5





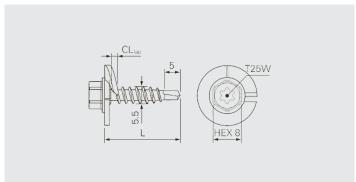

Application

Fastening of single ply insulated roof panel overlaps

| Component 1 (t _i) | Compone | ent 2 (t _{II}) | Max |
|-------------------------------|---------|--------------------------|-----|
| Single-ply panel | Steel | 0.4-1.0 | 2.0 |

Fastener material

Austenitic stainless steel A2, case hardened drill point Cutting disc: Austenitic stainless steel A2

Approvals





Features and Benefits

- Self-drilling fastener suitable for both the fixing of single ply insulated roof panels into light gauge steel and panel overlaps
- No pre-drilling of membrane and insulation required thanks to cutting-washer.
- · Self-coring fastener without disruption of the insulating material archieved by the cutting washer
- Flexibility given to the installer due to dual drive, which provides both a Hex and Torx drive option
- Secured against unwinding given by cut-off thread-end and free-spin zone





Fastener in A2 onto steel

| Product code | PU | L | CLap | |
|---------------------|-----|----|--------|---------|
| SXP2-HT-SC19-5,5x25 | 500 | 25 | 0.8-20 | 1686837 |

| - | | |
|---|--|--|
|---|--|--|

Accessories/Ancillaries

| Product code | PU | Drive | Head Drive | Length | |
|-------------------------|----|-------|------------|--------|---------|
| Drive Bar HEX8-1/4"-300 | 1 | 1/4" | HEX8 Drive | 300mm | 1823798 |
| T25W-175-HEX1/4" | | | T25 Drive | 175mm | 727979 |
| T25HF-240-HEX1/4" | | | | 240mm | 1223621 |

© SFS, 03/2024, TD_SXP2-HT-SC19-5,5_en, V1.02