



isoweld[®] Stress Plates for induction welding attachment



Application


TPO and PVC/KEE/TPA membrane attachment using isoweld[®] induction welding tools

Features and Benefits

- Proprietary adhesive for secure weld
- Stacked for ease of use
- 22 ga. G90 Galvanized steel

Product Selection

Material No.	Item	Description	Carton Wt. (lbs.)	Carton Qty.
1555270	isoweld [®] PVC plate	FI-P-6,8-PVC-PC	34	500
1555269	isoweld [®] TPO plate	FI-P-6,8-TPO-PC	34	500

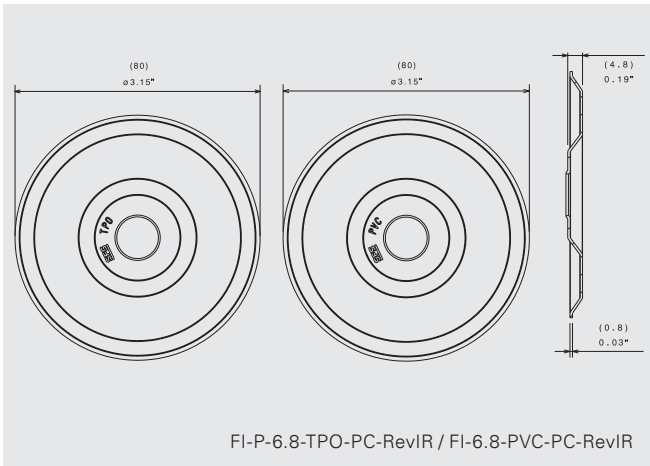

Specifications

OD: 3.15" (80 mm) Round
 Material: G90 Steel with proprietary adhesive coating
 Back of plate: Gray polyester coating
 Color (front of plate): TPO – Yellow
 PVC/KEE/TPA – Purple

Approvals



State of Florida: FL20311

22-0913.02

Installation and Application Considerations

Use with isoweld[®] induction welding tools and applications approved by the roofing system manufacturer. Use with:

- #15 Dekfast
- #12 Purlin
- TPR-L Peel Rivet

Contact SFS for special application use with #12 or #14 Dekfast

US
 T 800 234 4533
 us.sfs.com

Canada
 T 866 847 5400
 ca.sfs.com

Metric values are approximate conversions.

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes. (04/2024, V1.02)