


SOK-IT

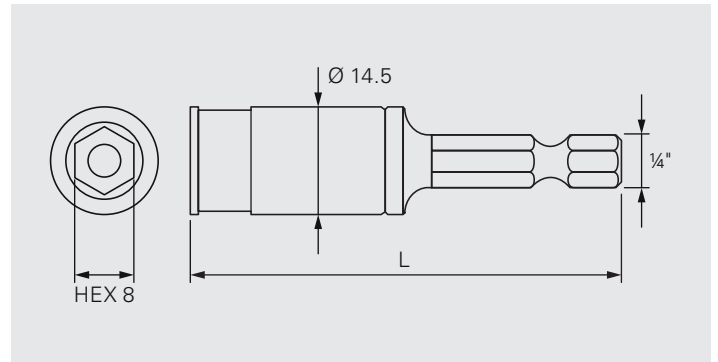

Application

Installation of all fasteners from diameter 4.8–6.3 mm
6Nm for Stainless steel fastener (black)
8Nm for Carbon steel fastener (gold)

Approvals



Material


With an 1/4" drive
With a safety ball for ideal hold

Features and Benefits

- Minimises fastener breakages due to incorrect setting of tool
- Reduces downtime and costs due to safe installation
- Two different torque levels (6+8Nm) for different applications and fasteners
- 5000 pcs. guaranteed safe installations when used correctly

Accessories/Ancillaries

Product code	PU	Drive	Head drive	
SOK-IT-¼"-57-6Nm	1	¼"	HEX8	1667323
SOK-IT-¼"-57-8Nm	1	¼"	HEX8	1667322

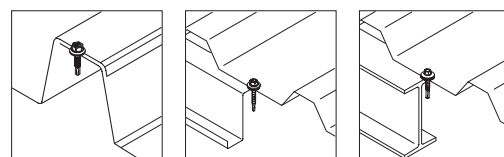

Recommended for the following SFS fastener

Stainless steel fastener	Torque force	Carbon steel fastener	Torque force
SX14-5,5	6Nm	SD14-H15-5,5	8Nm
SX5-5,5	6Nm	SD14-5,5	8Nm
SX3-6,0	6Nm	SD6-H15-5,5	8Nm
SXW-6,5	6Nm	SD5-5,5	8Nm
SL2-S-6,3	6Nm	SL3-H15-6,3	8Nm
		SL2-H15-6,3	8Nm
		SL2-4,8	8Nm
		CDM-4,8	8Nm

All measures in mm

The details stated are results of tests and/or calculations and therefore are non-binding and do not represent guaranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.